




KONICA MINOLTA

Giving Shape to Ideas

# RETHINK COLLABORATION

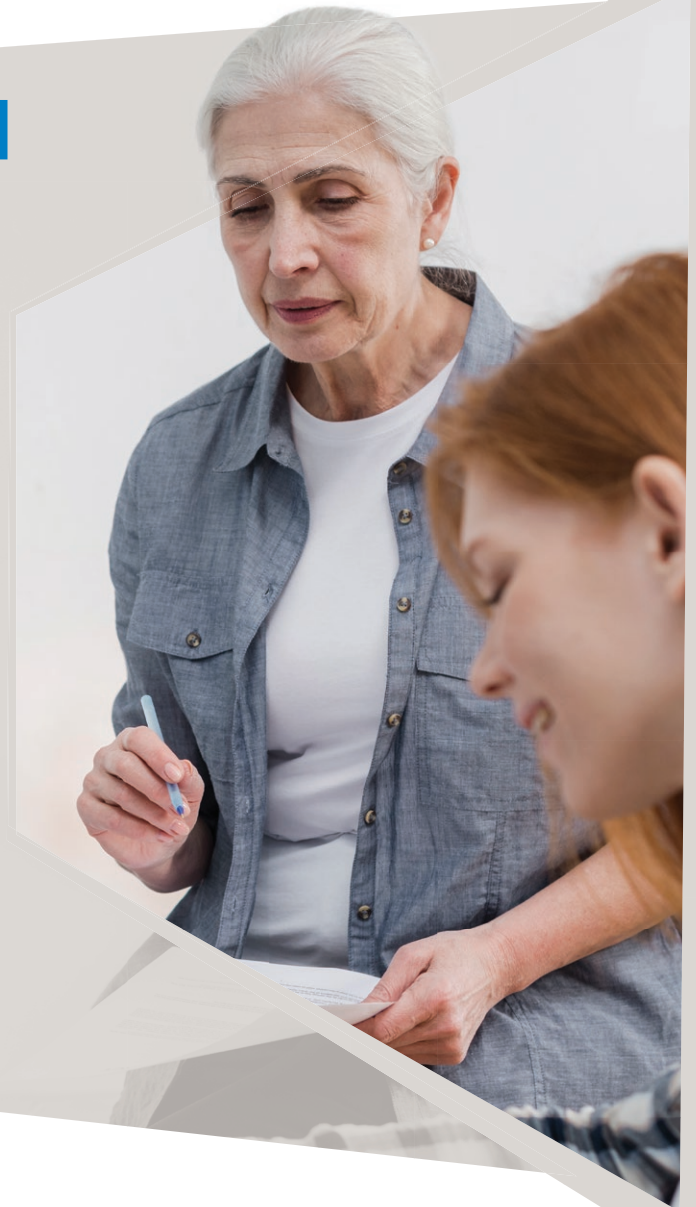

**innex** C570

Unified Communication Solutions



# 4K e-PTZ Conference Cam

with Dual Noise-Cancelling Mics

Introducing the Innex C570, the 4K 120° wide-angle webcam with AI-powered framing and intuitive remote control.



## 5X Digital Zoom

Up to 5X digital zoom with pan and tilt to select the exact view you need to focus on.



## 120° Wide View Angle

Designed for small-mid sized meeting spaces and classrooms, capture more with less space required.



## Auto-Framing

Camera embedded AI-powered smart framing. With one click, Innex C570 captures all participants and automatically adjust to the best framing position.



## Remote Control

With the intuitive buttons and keys, you can customize all the settings with ease. Easy, hassle-free. No software required.



## Noise-Cancelling Mic

Built-in two mics that picks up your voice clearly up to 4-meters, with noise-cancelling (ANS) to reduce background distractions.



E-pan, tilt and zoom to customize view

Compatible with your favorite software:



# Specifications



## Camera

Sensor	Adopt latest SONY IMX415 Sensor CMOS 1/2.8", 8.46M pixel, with high dynamic range and noise reduction, 1.5 times better sensitivity than IMX274 ( 1/2.5")
USB Video Class	UVC 1.0
Supported Video Resolution	MJPEG/H.264/H.265/YUV/NV12 @30fps 3840x2160 / 2560x1440 / 1920x1080 / 1280x720 / 1024x576 / 960x540 / 800x448 / 640x360 / 320x180 / 960x720 / 800x600 / 640 x 480 / 480x270 / 352x288 / 320x240
Maximum Video Resolution & FPS	USB3.0 - 3840x2160@30fps , USB2.0 1280x720@30fps
Viewing Angle	120°
Focus	50cm - ∞
F No.	F2.5
Zoom	5x Digital Zoom
Tilt Angle	±14°
Auto-Framing	✓
Auto White Balance	✓
Auto Exposure	✓
Auto Backlight Compensation	✓

## Microphone

Built-in Microphone	Dual Electret Microphones
Pick-up Distance	Effective: 0-4m Maximum: 8m
Signal/Noise (Amplitude)	f=1 KHz.Pin=1 Pa A=curve 65dB
Sensitivity	f=1 KHz.Pin=1 Pa -30±2dB
SPL (Sound Pressure Level)	100dB FS
Double Talk	✓
Active Noise Reduction & echo cancellation	✓
Auto Gain Control	✓
ESD Standard	Contact discharge to 4KV, Air discharge to 8KV
Eye Diagram	USB3.0 Eye Diagram Test Passed

## Others

Privacy Shutter	✓
Connectivity	USB-C to USB-A
Powered By	USB 3.0 (5V 900ma)
Operating System	Win 10/11, macOS 10.8 or above, Android, Linux
Mount Type	Clip / Tripod
Cable	USB-C to A Cable (2-meter)
Package Contents	Innex C570, USB cable, remote control, AAA battery for remote control



# KONICA MINOLTA



Funtech innovation

FTI designs represent innovative and AI-powered collaboration solutions that redefine remote communication, offering an unparalleled true-to-life experience in a virtual environment. Fueled by extensive data analytics and consumer insights, we incorporate elements of fun, artistic design, and surprising technologies into our offerings, with the aim of providing the most mind-blowing experiences for individuals.

**Distribution & Service Support by**

**Konica Minolta Business Solutions India Pvt. Ltd.**

Building No: 8, Tower-C. 10th Floor, DLF Cyber City, Phase-2, Gurugram, Haryana-122002, India | Board No. +91-124-6652000

URL: <https://bt.konicaminolta.in/> | [marcom@bin.konicaminolta.in](mailto:marcom@bin.konicaminolta.in)

Connect with us :    