

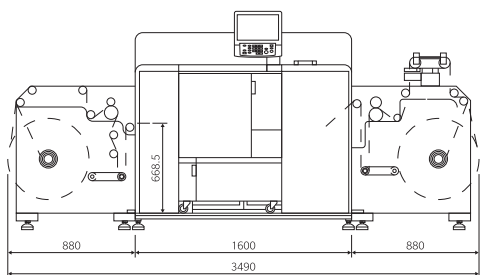


Major specifications for AccurioLabel 230 (Printer main body only)

Type	Console
Print method	Dry-toner electrophotography
Colour support	Full colour (CMYK)
Printing resolution/gradation	3600 dpi (equivalent) × 1200 dpi / 8 bit
Printing image size	90 × 115 to 320 × 1,195 mm
Paper width	250 to 330.2 mm
Paper thickness range	81 to 256 gsm (80 to 250 µm)
Print media	Non-tack paper (81 to 176 gsm) Tack paper (136 to 256 gsm) Tack coated paper G/M (136 to 256 gsm) Tack Synthetic paper (136 to 176 gsm) Tack PP (136 to 176 gsm) Tack PET (136 to 216 gsm)
Print speed	Speed range
	Max.: 23.4 m/min. (76 fpm) High: 18.9 m/min. (62 fpm) Middle: 13.5 m/min. (44 fpm) Low: 9.45 m/min. (31 fpm)
	By media weight
	81 to 176 gsm: Max. 23.4 m/min. 177 to 256 gsm: Max. 18.9 m/min.
Compatible file formats	PS, PDF (APPE supported), 8 bit TIFF
VDP file format	PPML, PDF-VT
Power source (Single phase)	Metric: 220 to 240 V 50/60 Hz, 25 A Inch: 208 to 240 V 60 Hz, 24 A
Max. power consumption	Metric: 6,000 W, Inch: 5,760 W
Dimensions (W × D × H)	1,200 × 903 × 1,478 mm
Weight	292 kg

* Specifications and features of the delivered product are subject to changes.

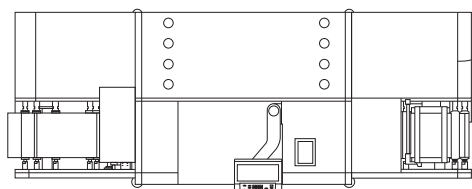

Major Specifications for Unwinder/Winder unit DP330

Maximum roll size	Ø 600mm
Power requirements	3 phase 380V, 20A, 50/60Hz
Print media	Paper: Tack paper, Non-tack paper Film: Tack film (Synthetic paper, PP, PET), etc.
Dimensions (W × D × H)	3,550 × 2,470 × 1,540 mm
Weight	Winding Unit: approx. 423kg Unwinding Unit: approx. 446 kg Platform: approx. 335 kg

Specifications for embedded controller

Type	Embedded (AIO) type Equivalent to IC-605B with UK-104
CPU	Intel Core i5 4570S 2.9 GHz (CPU in printer)
Memory	System Memory 16 GB
HDD	1 TB × 3 + 500 GB × 1
Network	10/100/1000 Base-T
PDL Language	PostScript 3 (CPSI 3020), PDF Ver.1.7, TIFF Ver.6 Compliant, PPML Ver.2.2, PCL5c equivalent, PCL XL (PCL6 Ver.3) equivalent, APPE Ver.4.6*1, PDF/VT Ver.2*1
Protocol	TCP/IP, NetBEUI, IPP, WSD, SMB, Bonjour
OS applicable	Windows 7, 8.1, 10 Windows Server 2008/R2, 2012/R2, 2016, 2019 (Includes 64 bit versions) Mac OS X 10.9, 10.10, 10.11, 10.12, 10.13, 10.14
Main fonts	Adobe 136 fonts, PCL 80 fonts
Driver	PS Plugin driver
Konica Minolta applications applicable	PS Web Connection, PS Net care Device Manager, Color Centro, AccurioPro Hot Folder

*1 UK-218 (Option) required

AccurioLabel 230



*1 Optional

Product appearance, configuration and/or specifications are subject to change without notice.
This product is not available for some countries or regions.

KONICA MINOLTA, symbol mark, Giving Shape to Ideas, AccurioLabel, AccurioPro, Simitri, S.E.A.D. and KONICA MINOLATA OPTIMIZED PRINT SERVICES are registered trademarks or trademarks of KONICA MINOLTA, INC.
Windows and Windows Server are registered trademarks or trademarks of Microsoft Corporation in the U.S. and other countries.
Adobe and PostScript are registered trademarks or trademarks of Adobe Systems Inc.
Mac OS is registered trademark or trademark of Apple Inc.
All other brands and product names are registered trademarks or trademarks of their respective companies or organisations.



From consulting, system design, to operations, Konica Minolta offers total support to optimise your office output environment.
<http://www.biz.konicaminolta.com/services/ops>



For Plastic Waste Management Details



For Battery Waste Management Details

Requirements for safeuse

- Please read and follow the instruction manual to ensure safe operation.
- Only operate using appropriate power supply and voltage.
- Connecting the earth wire to an inappropriate place may cause explosion or electric shock. Please connect accordingly (Taiwan and the Philippines only).

KONICA MINOLTA, INC.

2-7-2 Marunouchi Chiyoda-ku, Tokyo, Japan
<http://www.biz.konicaminolta.com>